



موسسة تكوين الحديثة للالات والمعدات

Takwin Modern EST. For Machinery & Equipment

Location;

Riyadh: Riyadh \ Al-Manakh \ Al-Kharj Road \ Exit-18

Jeddah: Jeddah \ Al-Haramain Road \ Abraq Al Raghama Area

Website;

www.takwinmodern.com

Email;

info@takwinmodern.com



موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MIZRAK BEAM SAW DRAGON PE - 424

- 1) Cutting Width 200 mm
- 2) Cutting Depth 4200 mm
- 3) Cutting Height 90 mm
- 4) Cutting Group Working Speed Maximum 70 m/min
- 5) Pusher (Pusher) Group Working Speed Maximum 45 m/min
- 6) Cutting Saw Dimensions $\varnothing 400 \times 4.4$ mm
- 7) Scribing Saw Dimensions $\varnothing 200 \times 4.4$ mm
- 8) Cutting Saw Speed 2945 Rpm
- 9) Scribing Saw Speed 2870 Rpm
- 10) Cutting Saw Motor Power 15 KW
- 11) Scribing Saw Motor Power 2.2 KW
- 12) Cutting Group Servo Motor 1.8 KW
- 13) Cutting Saw Servo Motor (Electric Cylinder) 750V
- 14) Pusher Servo Motor 1.8 KW
- 15) Snail Fan Motor 4KW
- 16) Cutter Group Dust Suction Pipe Diameter (Bottom Outlet) $\varnothing 100$ mm
- 17) Top Pressure Dust Suction Pipe Diameter (Top Outlet x3) $\varnothing 100$ mm
- 18) Machine Working Area 68 m²
- 19) Air Pressure 6 Bar
- 20) Network Voltage 400V-50Hz
- 21) Nominal Current 80A
- 22) Total Electricity 40KW
- 23) Machine Dimensions 7660x8900x2100mm
- 24) Machine Weight 7500kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

AYZA MIZRAK BEAM SAW LANZA P4-S

- 1) MAIN VOLTAGE: 400V-50Hz
- 2) TOTAL POWER: 25 kW
- 3) NOMINAL CURRENT: 40 A
- 4) AIR PRESSURE: 6 Bar
- 5) CUTTING WIDTH: 4300 mm
- 6) CUTTING DEPTH: 4300 mm
- 7) CUTTING HEIGHT: 95 mm
- 8) CARRIAGE SPEED: 90 m/dk
- 9) PUSHER SPEED: 50 m/dk
- 10) CUTTING UNIT MOTOR POWER: 11 kW/13,2 HP

- 11) SCORING UNIT MOTOR POWER: 2,2 kW/3 HP
- 12) CUTTING MOTOR TURN RATE: 4400 dev/dk
- 13) CUTTING BLADE: 360×4.4/3.2×65 Z72
- 14) SCORING BLADE: 180×4.4/3.5×65 Z36
- 15) DUST SUCTION PIPE DIAMETER: 100 mm (x3) - 150 mm(x1)
- 16) MACHINE SIZES: 6565x7670x2000 mm
- 17) MACHINE WORKING AREA: 51 m² (7.67×6.56)
- 18) CARRIAGE SERVO MOTOR: 1.5 kW
- 19) PUSHER SERVO MOTOR: 1.5 kW
- 20) SIDE SUPPORT SERVO MOTOR: 0,75 kW
- 21) MACHINE WEIGHT: 6000 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment



C.R 4030395646

VAT.No 310997524100003

AYZABAND-6 EDGE BAND MACHINE



- 1) VOLTAGE: 380/400 V- 50/60 Hz
- 2) CURRENT: 40 A
- 3) BAND THICKNESS: 0,4-3 mm
- 4) WORK PIECE THICKNESS: 8-45 mm
- 5) WORKING SPEED: 12-15 m/dk
- 6) PALLET MOTOR POWER: 3 kW/4Hp
- 7) POWER: 12kW
- 8) AIR PRESSURE: 6 Bar
- 9) GLUE BOX CAPACITY: 4 lt
- 10) GLUE HEATING TIME: 15 – 20 dk.
- 11) PRE MILLING MOTOR: 2x2.2 kW 12.000 d/dk
- 12) HEAD – END TRIMMING MOTOR: 2x0.45 kW 10.500 d/dk
- 13) MILLING CUTTER MOTOR: 2x0.45 kW 10.500 d/dk
- 14) CORNER ROUNDING MOTOR: 2x0.45 kW 10.500 d/dk
- 15) LENGTH: 5850 mm
- 16) WIDTH: 800 mm
- 17) HEIGHT: 1560 mm
- 18) WORKING HEIGHT: 900 mm
- 19) WEIGHT: 1800 kg.

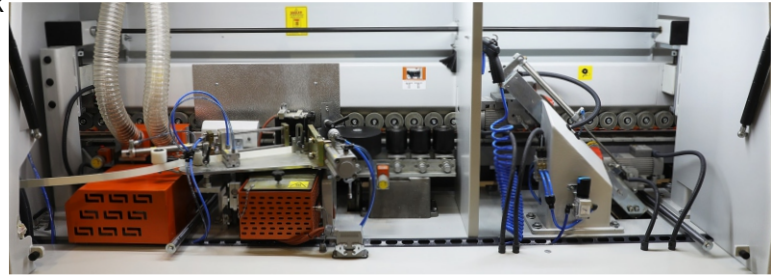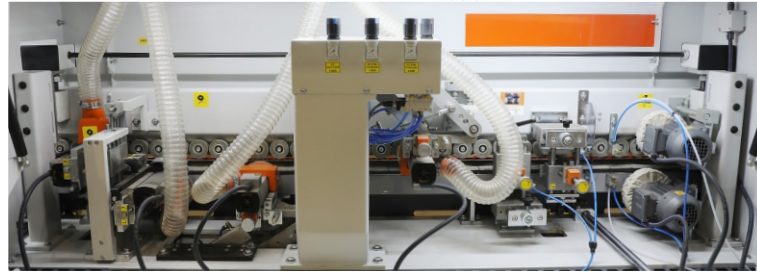

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment


C.R 4030395646

VAT.No 310997524100003

AYZABAND-4 FR EDGE BAND MACHINE



- 1) VOLTAGE 380/400 V – 50/60Hz.
- 2) BAND THICKNESS 0,4-3mm
- 3) WORK PIECE THICKNESS 8-65mm
- 4) WORKING SPEED 14.5m/dak
- 5) POWER 12 kW
- 6) AIR PRESSURE 6-8 bar
- 7) GLUE BOX CAPACITY 4 lt.
- 8) GLUE HEATING TIME 15-20 dk.
- 9) HEAD – END TRIMMING MOTOR 2x0,55kW/12.000 rpm
- 10) TOP-BOTTOM MILLING MOTOR 2x0,55kW/12.000 rpm
- 11) PRE MILLING MOTOR 2x2,2kW 12000 rpm
- 12) LENGTH 3920mm
- 13) WIDTH 800 mm
- 14) HEIGHT 1500mm
- 15) WEIGHT 1120 kg

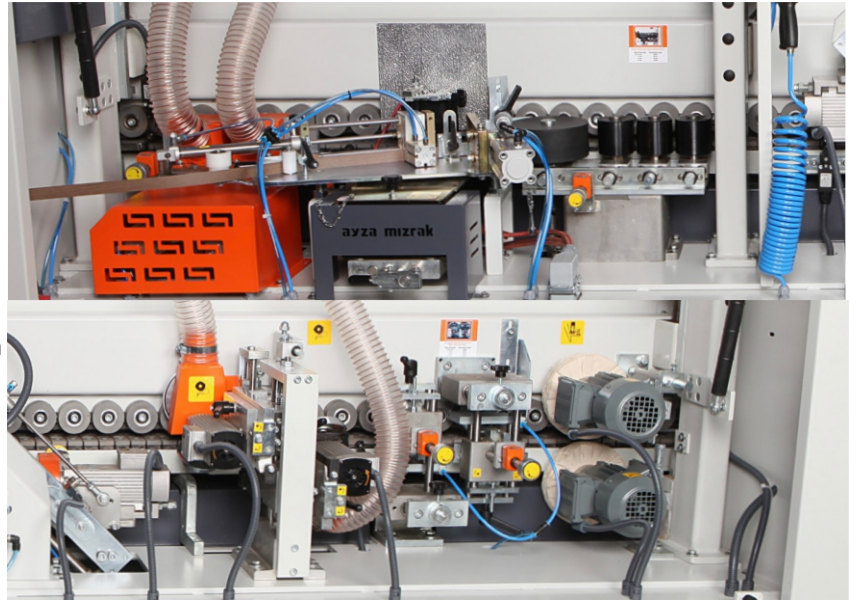

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

HASMAK HSM716S 12 UNIT EDGE BANDING



Premilling



Gluing, Band Feeding, Band Press Rollers
Premilling



Length Trim



Edge Trimmer
Top-Bottom Trim



Band Length Cutting
Corner Rounding



Corner Rounding
Radius Scrapper




Radius Scrapper
Solvent Cleaning



Solvent Spraying
Buffing



Buffing



- 1) Voltage: 380V / 400V - 50Hz
- 2) Power Requirement: 14,5kW
- 3) Edge Band Thickness: 0,40mm - 2,00mm
- 4) Panel Height: 8 - 48 mm
- 5) Feed Speed: 12-16 m/min
- 6) Air Pressure Requirement: 6 Bar
- 7) Pre-Milling Motor: 2 x 1,8Kw - 10.000 rpm
- 8) Length Trimmer Motor: 2 x 0,37 Kw - 12.000 rpm
- 9) Additional Top And Bottom Trimmer: 2 x 0,37 Kw - 12.000 rpm
- 10) Buffers: 2 x 0,18 Kw
- 11) Glue Tank Capacity: 2,5 kg
- 12) Heat Up Time: 20-30 min
- 13) Dimensions: 5200mm x 1050mm x (h) 1500mm

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

HASMAK HSM612S 10 UNIT EDGE BANDING




Premilling




Top-Bottom Trim




Corner Rounding





Radius Scraper



Solvent Cleaning



Buffing



Premilling

Gluing, Band Feeding, Band Press Rollers

Edge Trimmer

Corner Rounding

Radius Scraper

Solvent Spraying

Buffing

- 1) Voltage: 380V / 400V - 50Hz
- 2) Power Requirement: 13kW
- 3) Edge Band Thickness: 0,40mm - 2,00mm
- 4) Panel Height: 8 - 48 mm
- 5) Feed Speed: 12 m/min
- 6) Air Pressure Requirement: 5,5 Bar
- 7) Pre-Milling Motor: 2 x 1,8Kw - 10.000 rpm
- 8) Length Trimmer Motor: 2 x 0,37 Kw - 12.000 rpm
- 9) Additional Top And Bottom Trimmer: 2 x 0,37 Kw - 12.000 rpm
- 10) Buffers: 2 x 0,18 Kw
- 11) Glue Tank Capacity: 2,5 kg
- 12) Heat Up Time: 20-30 min
- 13) Dimensions: 4500mm x 1050mm x (h) 1500mm

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18

www.takwinmodern.com

Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com

Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ESMAK 12 UNIT EDGE BANDING



Jeddah/Al-Haramain Road/ Abraç Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

BOSS KB-100 12 UNIT EDGE BANDING MACHINE

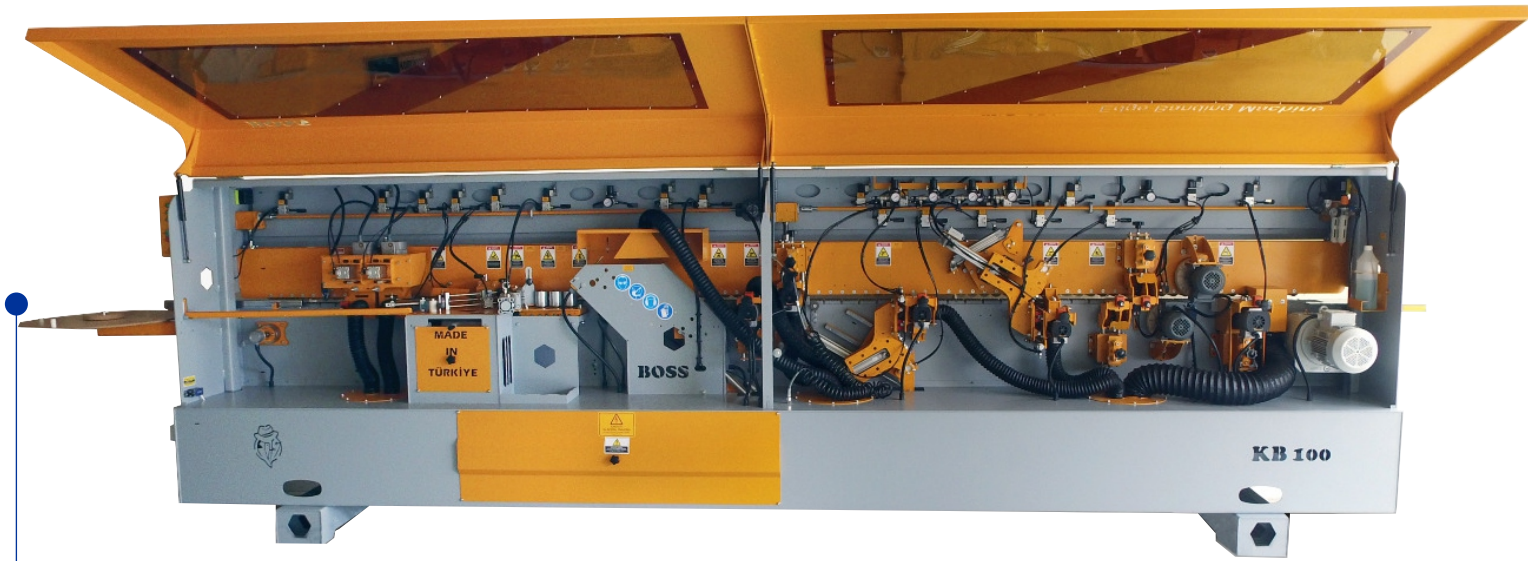

- 1) Tape Bonding Thickness: 0.40 mm-3 mm
- 2) Tape Bonding Height: 45 mm
- 3) Dimensions Of The Part To Be Bonded: 80 mm-150 mm
- 4) Working Speed (M./min): 14000 mm (Tul) (14 mt)
- 5) Front Milling Groups: 2x1.5 kW 12000 rpm
- 6) Front Milling Mutters: 20x70x50
- 7) Head End Cutting Group: 2x0.25 kW, 12000 rpm
- 8) Head End Cutting Saws: 3.2x20x100
- 9) Bottom And Top Milling Group: 2x 0.37 kW. 12000 rpm
- 10) Bottom And Top Milling Cutter: 6 teeth R 3
- 11) Bottom And Top Trim Group: 2x0.37 kW 12 000 rpm
- 12) Bottom And Top Trim Cutter: 6 teeth R4
- 13) Radius Scraping Thickness: 0.40 mm 2 mm.R 3
- 14) Bottom And Top Polishing Group: 2x0.25 kW, 3000 rpm
- 15) Grooving Group: 2.2 kW – 12 000 rpm
- 16) Grooving Saw: 4.5x20x90
- 17) Total electrical Power: 22 kW
- 18) Mains Voltage: 380 w – 50 Hz
- 19) Reducer Speed (per minute): 18 rpm
- 20) Pneumatic Bar Pressure: 10 Atü
- 21) Glue Pot Volume: 5 kg
- 22) Dust Suction Motor: 0.75 kW 3000 rpm



Jeddah/Al-Haramain Road/ Abraç Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

BOSS KB-70 7 UNIT EDGE BANDING MACHINE



- 1) Tape Bonding Thickness: 0.40 mm-3 mm
- 2) Tape Bonding Height: 45 mm
- 3) Dimensions Of The Part To Be Bonded: 80 mm-150 mm
- 4) Working Speed (M./min): 14000 mm (Tul) (14 mt)
- 5) Front Milling Groups: 2x1.5 kW 12000 rpm
- 6) Front Milling Mutters: 20x70x50
- 7) Head End Cutting Group: 2x0.25 kW, 12000 rpm
- 8) Head End Cutting Saws: 3.2x20x100
- 9) Bottom And Top Milling Group: 2x 0.37 kW. 12000 rpm
- 10) Bottom And Top Milling Cutter: 6 teeth R 3
- 11) Bottom And Top Trim Group: 2x0.37 kW 12 000 rpm
- 12) Bottom And Top Trim Cutter: 6 teeth R4
- 13) Radius Scraping Thickness: 0.40 mm 2 mm.R 3
- 14) Bottom And Top Polishing Group: 2x0.25 kW, 3000 rpm
- 15) Total electrical Power: 15 kW
- 16) Mains Voltage: 380 w – 50 Hz
- 17) Reducer Speed (per minute): 18 rpm
- 18) Pneumatic Bar Pressure: 10 Atü
- 19) Glue Pot Volume: 5 kg
- 20) Dust Suction Motor: 0.75 kW 3000 rpm

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MIZRAK ADVANTAGE-7

- Gluing unit,
- scissor unit,
- printing unit
- Front Mill
- Head-end cutting unit
- Milling unit
- Corner Rounding Unit
- 42mm Top Printing
- Radus Scraping unit
- Cleaning Liquid
- Polishing unit
- Pallet speed (10 m/min)
- Integrated Dust Absorption
- Grooving Unit



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MIZRAK ADVANTAGE-6

- Gluing unit,
- scissor unit,
- printing unit
- Front Mill
- Head-end cutting unit
- Milling unit
- Corner Rounding Unit
- 42mm Top Printing
- Radus Scraping unit
- Cleaning Liquid
- Polishing unit
- Pallet speed (10 m/min)
- Integrated Dust Absorption



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MIZRAK MZK-4

- Gluing unit,
- scissor unit,
- printing unit
- Head-end cutting unit
- Milling unit
- Rarus Scraping unit
- Cleaning Liquid
- Polishing unit
- Pallet speed (14 m/min)

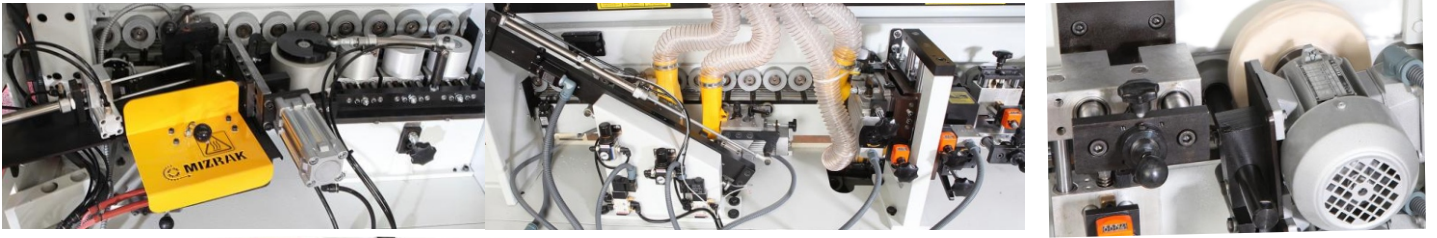

Jeddah/Al-Haramain Road/ Abraç Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ANKA-6 10 UNIT EDGE BANDING MACHINE

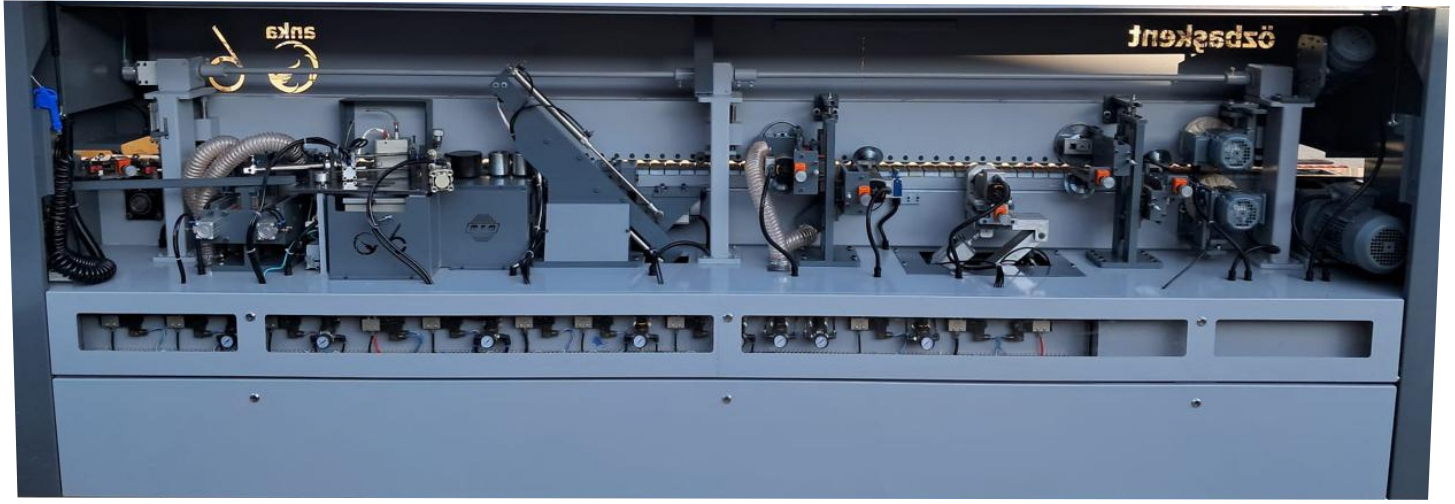

- 1) Tape Bonding Thickness: 0.40 mm-3 mm
- 2) Tape Bonding Height: 45 mm
- 3) Dimensions Of The Part To Be Bonded: 80 mm-150 mm
- 4) Working Speed (M./min): 14000 mm (Tul) (14 mt)
- 5) Front Milling Groups: 2x1.5 kW 12000 rpm
- 6) Front Milling Cutters: 20x70x50
- 7) Head End Cutting Group: 2x0.25 kW, 12000 rpm
- 8) Head End Cutting Saws: 3.2x20x100
- 9) Bottom And Top Milling Group: 2x 0.37 kW. 12000 rpm
- 10) Bottom And Top Milling Cutter: 6 teeth R 3
- 11) Bottom And Top Trim Group: 2x0.37 kW 12 000 rpm
- 12) Bottom And Top Trim Cutter: 6 teeth R4
- 13) Radius Scraping Thickness: 0.40 mm 2 mm.R 3
- 14) Bottom And Top Polishing Group: 2x0.25 kW, 3000 rpm
- 15) Total electrical Power: 15 kW
- 16) Mains Voltage: 380 w – 50 Hz
- 17) Reducer Speed (per minute): 18 rpm
- 18) Pneumatic Bar Pressure: 10 Atü
- 19) Glue Pot Volume: 5 kg
- 20) Dust Suction Motor: 0.75 kW 3000 rpm

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ANKA-5 7 UNIT EDGE BANDING MACHINE



- 1) Tape Bonding Thickness: 0.40 mm-3 mm
- 2) Tape Bonding Height: 45 mm
- 3) Dimensions Of The Part To Be Bonded: 80 mm-150 mm
- 4) Working Speed (M./min): 14000 mm (Tul) (14 mt)
- 5) Front Milling Groups: 2x1.5 kW 12000 rpm
- 6) Front Milling Mutters: 20x70x50
- 7) Head End Cutting Group: 2x0.25 kW, 12000 rpm
- 8) Head End Cutting Saws: 3.2x20x100
- 9) Bottom And Top Milling Group: 2x 0.37 kW. 12000 rpm
- 10) Bottom And Top Milling Cutter: 6 teeth R 3
- 11) Bottom And Top Trim Group: 2x0.37 kW 12 000 rpm
- 12) Bottom And Top Trim Cutter: 6 teeth R4
- 13) Radius Scraping Thickness: 0.40 mm 2 mm.R 3
- 14) Bottom And Top Polishing Group: 2x0.25 kW, 3000 rpm
- 15) Total electrical Power: 15 kW
- 16) Mains Voltage: 380 w – 50 Hz
- 17) Reducer Speed (per minute): 18 rpm
- 18) Pneumatic Bar Pressure: 10 Atü

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18

www.takwinmodern.com

Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com

Tel: 0555224689





موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment


C.R 4030395646

VAT.No 310997524100003

ATAMAK-8 8 UNIT EDGE BANDING MACHINE



- 1) Tape Bonding Thickness: 0.40 mm-3 mm
- 2) Tape Bonding Height: 45 mm
- 3) Dimensions Of The Part To Be Bonded: 80 mm-150 mm
- 4) Working Speed (M./min): 14000 mm (Tul) (14 mt)
- 5) Front Milling Groups: 2x1.5 kW 12000 rpm
- 6) Front Milling Cutters: 20x70x50
- 7) Head End Cutting Group: 2x0.25 kW, 12000 rpm
- 8) Head End Cutting Saws: 3.2x20x100
- 9) Bottom And Top Milling Group: 2x 0.37 kW. 12000 rpm
- 10) Bottom And Top Milling Cutter: 6 teeth R 3
- 11) Bottom And Top Trim Group: 2x0.37 kW 12 000 rpm
- 12) Bottom And Top Trim Cutter: 6 teeth R4
- 13) Radius Scraping Thickness: 0.40 mm 2 mm.R 3
- 14) Bottom And Top Polishing Group: 2x0.25 kW, 3000 rpm
- 15) Total electrical Power: 22 kW
- 16) Mains Voltage: 380 w – 50 Hz
- 17) Reducer Speed (per minute): 18 rpm
- 18) Pneumatic Bar Pressure: 10 Atü

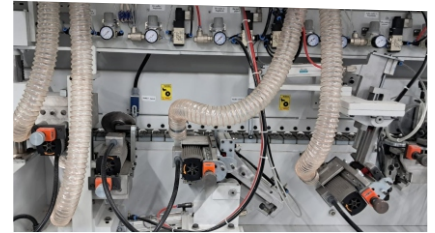

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ATAMAK-5 7 UNIT EDGE BANDING MACHINE

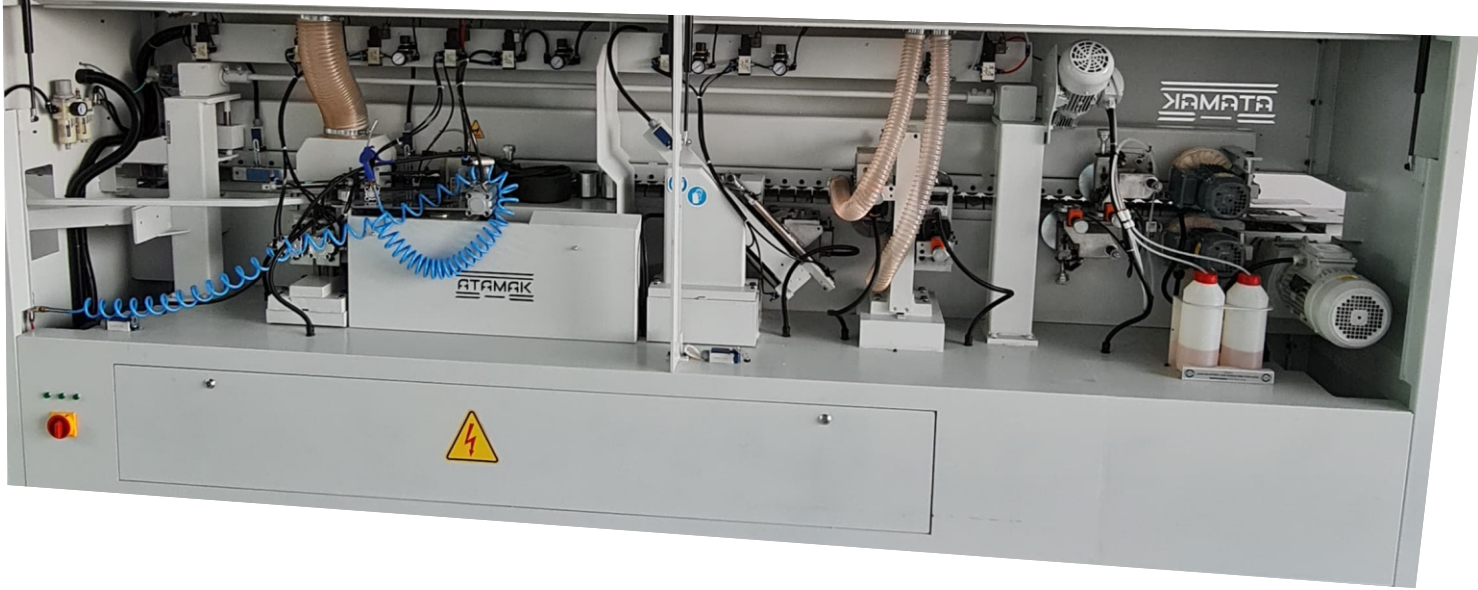

- 1) Tape Bonding Thickness: 0.40 mm-3 mm
- 2) Tape Bonding Height: 45 mm
- 3) Dimensions Of The Part To Be Bonded: 80 mm-150 mm
- 4) Working Speed (M./min): 14000 mm (Tul) (14 mt)
- 5) Front Milling Groups: 2x1.5 kW 12000 rpm
- 6) Front Milling Mutters: 20x70x50
- 7) Head End Cutting Group: 2x0.25 kW, 12000 rpm
- 8) Head End Cutting Saws: 3.2x20x100
- 9) Bottom And Top Milling Group: 2x 0.37 kW. 12000 rpm
- 10) Bottom And Top Milling Cutter: 6 teeth R 3
- 11) Bottom And Top Trim Group: 2x0.37 kW 12 000 rpm
- 12) Bottom And Top Trim Cutter: 6 teeth R4
- 13) Radius Scraping Thickness: 0.40 mm 2 mm.R 3
- 14) Bottom And Top Polishing Group: 2x0.25 kW, 3000 rpm
- 15) Total electrical Power: 15 kW
- 16) Mains Voltage: 380 w – 50 Hz
- 17) Reducer Speed (per minute): 18 rpm
- 18) Pneumatic Bar Pressure: 10 Atü



Jeddah/Al-Haramain Road/ Abraç Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ATAMAK-4 5 UNIT EDGE BANDING MACHINE

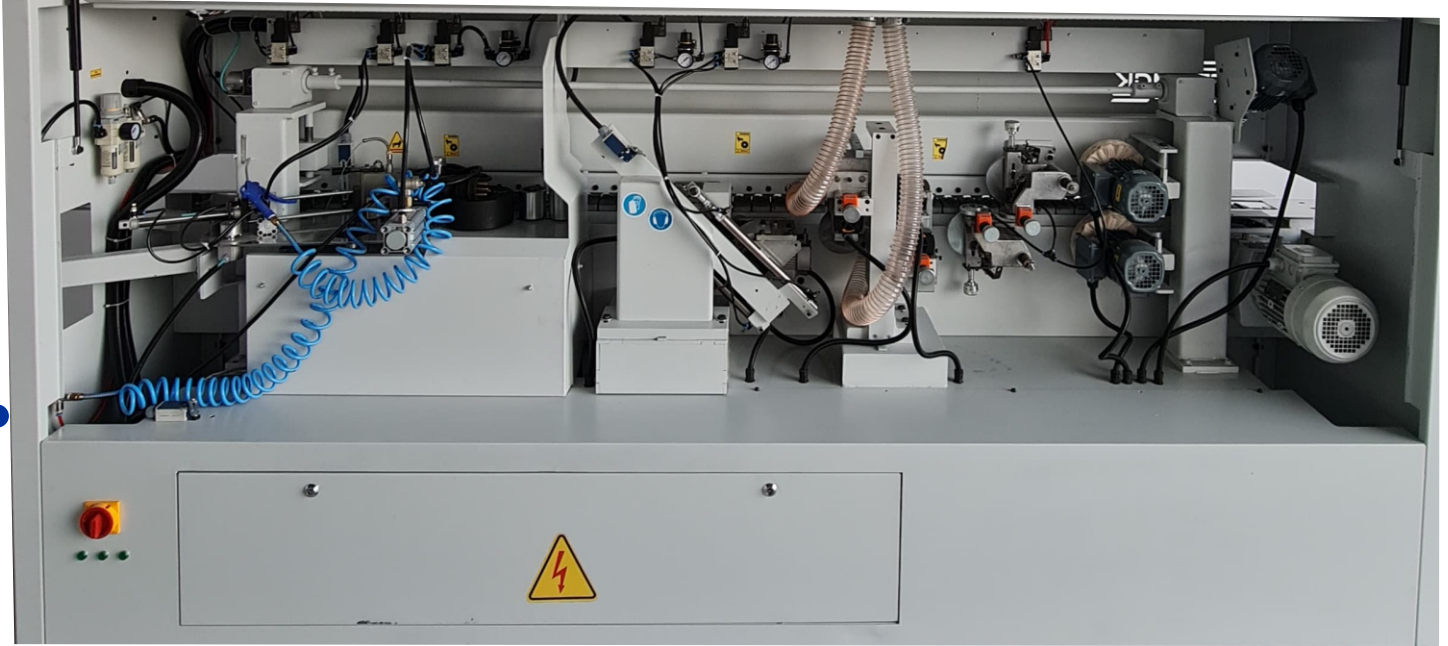

- 1) Tape Bonding Thickness: 0.40 mm-3 mm
- 2) Tape Bonding Height: 45 mm
- 3) Dimensions Of The Part To Be Bonded: 80 mm-150 mm
- 4) Working Speed (M./min): 14000 mm (Tul) (14 mt)
- 5) Head End Cutting Group: 2x0.25 kW, 12000 rpm
- 6) Head End Cutting Saws: 3.2x20x100
- 7) Bottom And Top Milling Group: 2x 0.37 kW. 12000 rpm
- 8) Bottom And Top Milling Cutter: 6 teeth R 3
- 9) Bottom And Top Trim Group: 2x0.37 kW 12 000 rpm
- 10) Bottom And Top Trim Cutter: 6 teeth R4
- 11) Radius Scraping Thickness: 0.40 mm 2 mm.R 3
- 12) Bottom And Top Polishing Group: 2x0.25 kW, 3000 rpm
- 13) Total electrical Power: 15 kW
- 14) Mains Voltage: 380 w – 50 Hz
- 15) Reducer Speed (per minute): 18 rpm
- 16) Pneumatic Bar Pressure: 10 Atü



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ATAMAK 3200 CIRCULAR SAW BLADE MACHINE

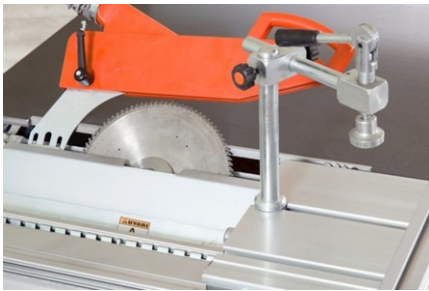

- 1) Fixed Table: 900 mm x 740 mm
- 2) Aluminum Moving Table: 360 mm x 3200 mm
- 3) Motor Power: 5 kW 7.5 hp
- 4) Saw Speed: 3000 x 6000 min/min
- 5) Saw Diameter max.: 30 x 400 min.: 30 x 200
- 6) Scriber Motor Power: 0.55 kW – 0.75 hp
- 7) Scriber Speed: 8000 min/min
- 8) Scriber Saw Diameter: 20 x 125 mm
- 9) Fixed Table Cutting Capacity: 1200 mm
- 10) Moving Table Cutting Capacity: 3200 mm
- 11) Cutting Angle: 45° – 90°
- 12) Working Cutting Height: 90° – 1300 mm 45° – 650 mm
- 13) Carrier Cart: 600 mm x 1250 mm
- 14) Height: 1000 mm
- 15) Width: 2000 mm
- 16) Width: 3500 mm
- 17) Weight: (Approximately) 720 kg


Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





ESMAK SAW MACHINE 3200

- 1) Max. Diameter of Outer and Inner: \varnothing 300 x 30 mm. - 400 x 30 mm.
- 2) Max. Cutting Depth (90°): \varnothing 300 - 80 / \varnothing 400 - 100
- 3) Max. Cutting Depth (45°): 60 mm
- 4) Max. Width of Cut: 120
- 5) Circular Saw (R.P.M): 4000 x 5500 rpm
- 6) Power of Saw Motor: 4 Hp
- 7) Table Dimensions: 680 x 1000 mm
- 8) Measure of Disc Added Iron Disc: 630 x 1000 mm
- 9) Measure of Shield On Table: 1000 x 1500 mm
- 10) Measure of Wandering Sledge: 380 x 3000 mm
- 11) Movement of Wandering Sledge Shield: 3200 mm
- 12) Measure of Wandering Sledge Shield: 700 x 50 mm
- 13) Angle of Wandering Sledge Shield: \varnothing -45° (right and left)
- 14) Dust Vacuuming Connecting: 120 mm
- 15) Inside and Outside Diameter of Stripe Saw: \varnothing 125 x \varnothing 20 mm
- 16) Speed of Stripe Saw (R.P.M): 6000 d/dk
- 17) Power of Stripe Saw Motor: 0.75 Hp
- 18) Net Weight: 820 Kg

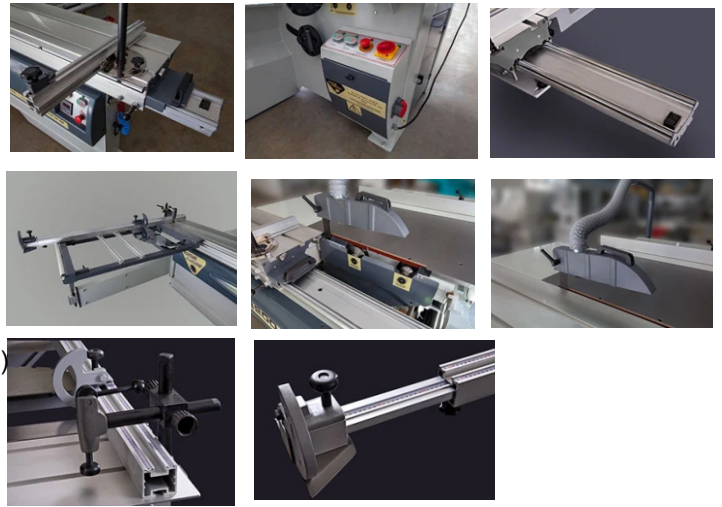



موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

AYZA MIZRAK CLASSIC SAW MACHINE 3200 5,5 hp

- 1) SLIDING TABLE SIZE: 3200MM
- 2) DIAMETER OF BLADE: 300MM
- 3) DIAMETER OF SPINDLE: 30mm
- 4) MAX. DEPTH OF CUT (\varnothing 300MM): 78mm
- 5) MAX. DEPTH OF CUT AT 45° TILTED POSITION: 55mm
- 6) MAX. WIDTH OF CUT: 1300mm
- 7) MAX. MOVEMENT OF ALUMINUM TABLE: 3200mm
- 8) DIMENSIONS OF MAIN TABLE: 950x600mm
- 9) DIMENSIONS OF ADDITIONAL TABLE: 950x750mm
- 10) DIMENSIONS OF ADDITIONAL SIDE TABLE: 800x500mm
- 11) PROFILE CARRIAGE DIMENSIONS: 1530x650mm
- 12) TILTING OF BLADE: 0°-45°
- 13) DUST VACUUMING CONNECTOR: 120mm
- 14) MOTOR POWER: 4kW
- 15) SPEED OD SAW BLADE: 3700-5100 rpm
- 16) NET WEIGHT: 660 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

AYZA MIZRAK CLASSIC SAW MACHINE 3200 7,5 hp

- 1) SLIDING TABLE SIZE: 3200MM
- 2) DIAMETER OF BLADE: 300MM
- 3) DIAMETER OF SPINDLE: 30mm
- 4) MAX. DEPTH OF CUT (\varnothing 300MM): 78mm
- 5) MAX. DEPTH OF CUT AT 45° TILTED POSITION: 55mm
- 6) MAX. WIDTH OF CUT: 1300mm
- 7) MAX. MOVEMENT OF ALUMINUM TABLE: 3200mm
- 8) DIMENSIONS OF MAIN TABLE: 950x600mm
- 9) DIMENSIONS OF ADDITIONAL TABLE: 950x750mm
- 10) DIMENSIONS OF ADDITIONAL SIDE TABLE: 800x500mm
- 11) PROFILE CARRIAGE DIMENSIONS: 1530x650mm
- 12) TILTING OF BLADE: 0°-45°
- 13) DUST VACUUMING CONNECTOR: 120mm
- 14) MOTOR POWER: 5.6kW
- 15) SPEED OD SAW BLADE: 3700-5100 rpm
- 16) NET WEIGHT: 660 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

AYZA MIZRAK GOLD SAW MACHINE 3200 7,5 hp

- 1) SLIDING TABLE SIZE: 3200mm
- 2) DIAMETER OF BLADE: 300mm
- 3) DIAMETER OF SPINDLE: 30mm
- 4) MAX. DEPTH OF CUT (\varnothing 300MM): 78mm
- 5) MAX. DEPTH OF CUT AT 45° TILTED POSITION: 55mm
- 6) MAX. WIDTH OF CUT: 1300mm
- 7) MAX. MOVEMENT OF ALUMINUM TABLE: 3200mm
- 8) DIMENSIONS OF MAIN TABLE: 950x600mm
- 9) DIMENSIONS OF ADDITIONAL TABLE: 950x750mm
- 10) DIMENSIONS OF ADDITIONAL SIDE TABLE: 800x500mm
- 11) PROFILE CARRIAGE DIMENSIONS: 1530x650mm
- 12) TILTING OF BLADE: 0°-45°
- 13) DUST VACUUMING CONNECTOR: 120mm
- 14) MOTOR POWER: 5,6kW
- 15) SPEED OD SAW BLADE: 3700-5100 rpm
- 16) NET WEIGHT: 680 kg

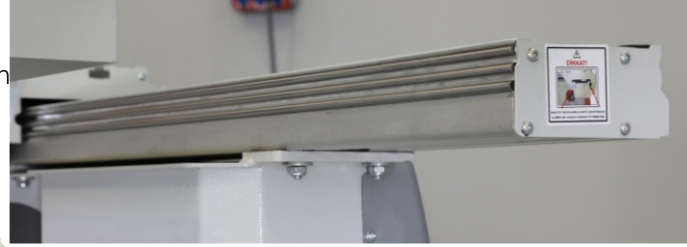

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

AYZA MIZRAK CLASSIC SAW MACHINE 3800

- 1) SLIDING TABLE SIZE: 3800mm
- 2) DIAMETER OF BLADE: 300mm
- 3) DIAMETER OF SPINDLE: 30mm
- 4) MAX. DEPTH OF CUT (\varnothing 300MM): 78mm
- 5) MAX. DEPTH OF CUT AT 45° TILTED POSITION: 55mm
- 6) MAX. WIDTH OF CUT: 1300mm
- 7) MAX. MOVEMENT OF ALUMINUM TABLE: 3200mm
- 8) DIMENSIONS OF MAIN TABLE: 950x600mm
- 9) DIMENSIONS OF ADDITIONAL TABLE: 950x750mm
- 10) DIMENSIONS OF ADDITIONAL SIDE TABLE: 800x500mm
- 11) PROFILE CARRIAGE DIMENSIONS: 1530x650mm
- 12) TILTING OF BLADE: 0°-45°
- 13) DUST VACUUMING CONNECTOR: 120mm
- 14) MOTOR POWER: 4kW
- 15) SPEED OD SAW BLADE: 3700-5100 rpm
- 16) NET WEIGHT: 720 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment


C.R 4030395646

VAT.No 310997524100003

OMAKSAN CNC BORING MACHINE

Technical Specifications

Kontrol Programı	Control Program	Omaksan Works
Maksimum Çalışma Alanı	Maksimum Working Area	X-Sınırsız / Y-1000 / Z-55 (mm)
Minimum Çalışma Alanı	Minimum Working Area	X-200 / Y-100 / Z-10 (mm)
Delici Ünite Dikey Matkap Sayısı	Drilling Unit Vertical Spindle 8 (n0) Number	
Delici Ünite Yatay Matkap Sayısı	Drilling Unit Horizontal Spindle Number	6 (n0)
Delici Ünite Testere Sayısı	Drilling Unit Saw Blade Number	1 (n0)
Freze Motor Gücü	Milling Unit Motor Power	2,2 (kw)
Barkod Okuyucu	Barcode Reader	Optional/Opsiyonel



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

CNC BORING MACHINE 6-SIDES

Processing Length	70mm-2750mm
Processing Width	35mm-1200mm
Processing Thickness	12-50mm
Drill Packages	1 Upper + 1 Lower
Upper Drills	12 Vertical + 8 Horizontal
Lower Drills	8 Vertical
Upper Spindle	3.5kw Air Cooling Spindle
Lower Spindle	3.5kw Air Cooling Spindle
Upper Auxiliary Cylinder	12 pieces
Lower Auxiliary Cylinder	2 pieces
Maximum Speed of X/U Axis	130m/Min
MaximumSpeed of Y/A Axis	80m/Min
Maximum Speed of Z Axis	50m/Min
Max. Speed of V Axis	80m/Min
Max. Speed of W Axis	50m/Min
Supported file formats	MPR/BAN/XML/DXF etc.
Driving System	EtherCAT AC Servo
Operating Computer System	Windows7
Working Air Pressure	0.8Mpa/m2
Dust Extraction Outlet	150mm*2
Total power	26kw
Overall size	4300*2250*2200mm
Weight	3000kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689







موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

NEV UNSAL 4x21 MULTI BORING MACHINE

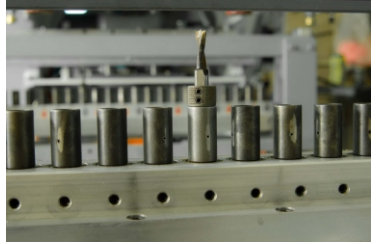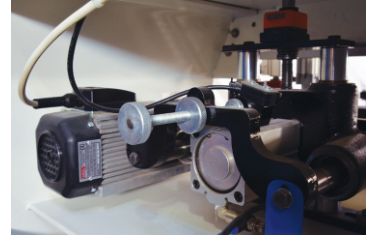

- 1) DRILL CENTER DISTANCE: 32 MM X 64 MM
- 2) MAXIMUM BORING BOTTOM SIDE: 50 MM
- 3) MAXIMUM BORING FRONT SIDE: 50 MM
- 4) SUPPORTING COMPONENTS: PNEUMATIC - 4 PIECES
- 5) TOTAL ELECTRIC POWER: 6 kW
- 6) AIR PRESSURE: 6 - 8 BAR
- 7) PNEUMATIC PRESS: 6 PIECES
- 8) CALIBRATION: INDICATOR
- 9) VERTICAL BORING HEADS: CAN BE TURN 90 DEGREE
- 10) UNIT FASTENING: PNEUMATIC
- 11) BORING SPEED: ADJUSTABLE
- 12) DRILL CHUCKS: DRILL HOLDERS
- 13) TABLE SIZES: 100 X 160 CM
- 14) LENGTH - HEIGHT - WIDTH: 250 CM - 145 CM - 145 CM
- 15) WEIGHT: 1600 KG

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689








موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment


C.R 4030395646

VAT.No 310997524100003

NEV UNSAL 3x21 MULTI BORING MACHINE

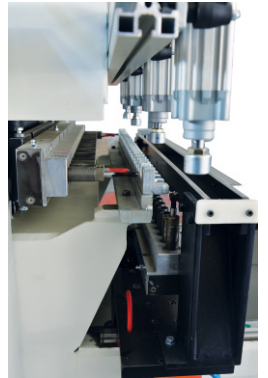

- 1) DRILL CENTER DISTANCE: 32 MM X 64 MM
- 2) MAXIMUM BORING BOTTOM SIDE: 50 MM
- 3) MAXIMUM BORING FRONT SIDE: 50 MM
- 4) SUPPORTING COMPONENTS: PNEUMATIC - 4 PIECES
- 5) TOTAL ELECTRIC POWER: 6 kW
- 6) AIR PRESSURE: 6 - 8 BAR
- 7) PNEUMATIC PRESS: 6 PIECES
- 8) CALIBRATION: INDICATOR
- 9) VERTICAL BORING HEADS: CAN BE TURN 90 DEGREE
- 10) UNIT FASTENING: PNEUMATIC
- 11) BORING SPEED: ADJUSTABLE
- 12) DRILL CHUCKS: DRILL HOLDERS
- 13) TABLE SIZES: 100 X 160 CM
- 14) LENGTH - HEIGHT - WIDTH: 250 CM - 145 CM - 145 CM
- 15) WEIGHT: 1600 KG

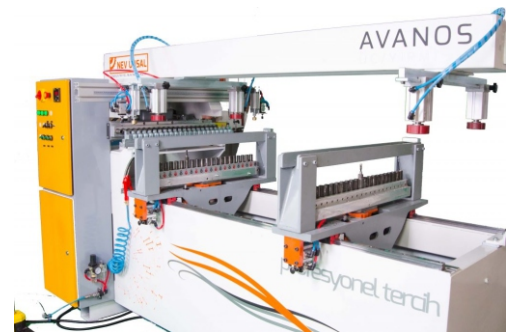

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ASWOOD DOOR LOCK HINGE HANDLE BORING MACHINE



Arm Lock Ax. Between	: 60 - 120 mm
Opened Lock Location Length	: 220 mm
Opened Mirror Location Length	: 280 mm
Arm Lock Drilling Motor Power	: 1.5 Kw / 50 Hz
Arm Lock Place Drilling Motor Speed	: 3750 r.p.m
Lock Location Punching Motor Power	: 2.2 Kw / 50 Hz
Lock Place Punching Engine Speed	: 8,500 r.p.m

Hinge Opening Motor Power	: 0.9 Kw / 200 Hz
Opening Hinge Engine Speed	: 12000 r.p.m
Total Engine Power	: 6 Kw
Air Inlet Pressure	: 6 - 8 bar
Height	: 2300 mm
Width	: 1100 mm
Height	: 1550 mm
Weight	: 900 kg

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





CNC ROUTER Cr1325



- 1) X Working Area: 1300mm
- 2) Y Working Area: 2500mm
- 3) Z Working Area: 200mm
- 4) Traveling Positioning Accuracy: ± 0.05 mm
- 5) Repositioning Positioning Accuracy: ± 0.05 mm
- 6) Table Surface: Aluminum table
- 7) Body structure: Steel structure with six legs
- 8) X,Y,Z Structure: German gear wheel for XY axis, Taiwan TBI ball screw for Z axis
- 9) Max. Power Consumption(Without spindle): 1.84KW
- 10) Max. Rapid Travel Rate: 45000mm/min
- 11) Max. Working Speed: 25000mm/min
- 12) Spindle Power Motor: 3KW water Cooling spindle
- 14) Spindle Speed: 0-24000r/min
- 15) Drive Motor: Stepper motor & Leadshine driver
- 16) Inverter: 3.7KW XFT inverter
- 17) Command: G-code*.u00*.mmg*.plt
- 18) Working voltage: AC220V/380V 50/60Hz
- 19) Control System: NC studio system
- 20) Guide rail: 20mm square guide rail for XYZ axis;
- 21) Oiling system: Manually oiling
- 22) Control cabinet: Independence cabinet
- 23) Applicable material: Wood,plywood,acrylic,metal,aluminum,brass,glass etc





CNC ROUTER Cr2040



- 1) X Working Area: 2000mm
- 2) Y Working Area: 4000mm
- 3) Z Working Area: 200mm
- 4) Traveling Positioning Accuracy: ± 0.05 mm
- 5) Repositioning Positioning Accuracy: ± 0.05 mm
- 6) Table Surface: Aluminum table
- 7) Body structure: Steel structure with six legs
- 8) X,Y,Z Structure: German gear wheel for XY axis, Taiwan TBI ball screw for Z axis
- 9) Max. Power Consumption(Without spindle): 1.84KW
- 10) Max. Rapid Travel Rate: 45000mm/min
- 11) Max. Working Speed: 25000mm/min
- 12) Spindle Power Motor: 6KW Air Cooling spindle
- 14) Spindle Speed: 0-24000r/min
- 15) Drive Motor: Servo Motor
- 16) Inverter: 7.5 KW XFT inverter
- 17) Command: G-code*.u00*.mmg*.plt
- 18) Working voltage: AC220V/380V 50/60Hz
- 19) Control System: NC studio system
- 20) Guide rail: 20mm square guide rail for XYZ axis;
- 21) Oiling system: Manually oiling
- 22) Control cabinet: Independence cabinet
- 23) Applicable material: Wood,plywood,acrylic,metal,aluminum,brass,glass etc





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

Co2 LASER CNC MACHINE



- 1) Working Area: **1300 x 2500 mm**
- 2) Laser Power: **150W**
- 3) Laser Type: Co2 laser tube
- 4) Applicable Materials: **Acrylic, wood, plywood, mdf, glass, stone, plastic, rubber, leather**
- 5) Cooling Ways: Water Cooling
- 6) Engraving Ways: 0-60000 m/min
- 7) Cutting Speed: 0-40000 m/min
- 8) Laser Output Control: 0-100% controlled by software
- 9) Scanning Resolution: 4000DPI
- 10) Compatible Software: Coreldraw, autocad
- 11) Working Environment Temperature: 0-45 celcius
- 12) Power Supply: 220V,50hz/60hz

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





CNC ROUTER

- 1) X Working Area: 1300mm
- 2) Y Working Area: 2500mm
- 3) Z Working Area: 200mm
- 4) Traveling Positioning Accuracy: ± 0.05 mm
- 5) Repositioning Positioning Accuracy: ± 0.05 mm
- 6) Table Surface: Aluminum table
- 7) Body structure: Steel structure with six legs
- 8) X,Y,Z Structure: German gear wheel for XY axis, Taiwan TBI ball screw for Z axis
- 9) Max. Power Consumption(Without spindle): 1.84KW
- 10) Max. Rapid Travel Rate: 45000mm/min
- 11) Max. Working Speed: 25000mm/min
- 12) Spindle Power Motor: 6KW AIR Cooling spindle
- 14) Spindle Speed: 0-24000r/min
- 15) Drive Motor: SERVO motor & Leadshine driver
- 16) Inverter: 5.5KW BEST inverter
- 17) Command: G-code*.G.code*.mm*.plt
- 18) Working voltage: AC220V/380V 50/60Hz
- 19) Control System: hand controller system
- 20) Guide rail: 20mm square guide rail for XYZ axis;
- 21) Oiling system: AUTO oiling
- 22) Control cabinet: Independence cabinet
- 23) Applicable material: Wood,plywood,acrylic,SOME metal,aluminum,brass,glass etc





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ATC CNC ROUTER MACHINE

- 1) 9 Kw Spindle Power
- 2) Tool Auto Change 12 pcs
- 3) Vacuum Table
- 4) Dust Collector
- 5) Weihong Control System
- 6) Linear Guid 35mm



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ATAMAK CURVED MOLDING DOOR MACHINE

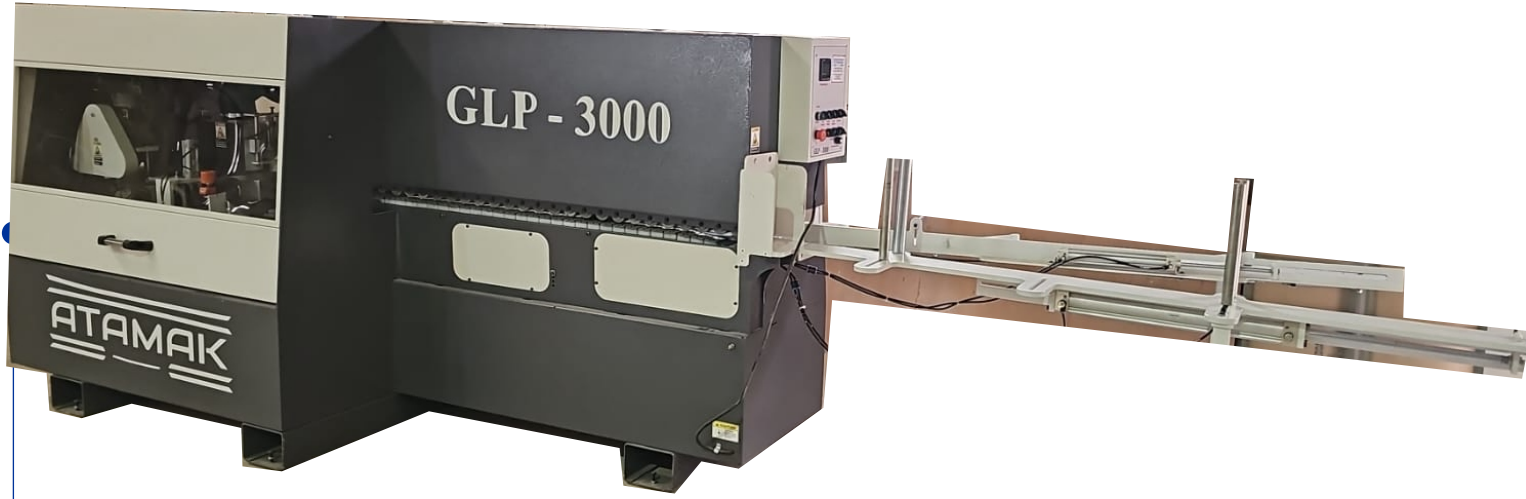

- 1) Work Piece Thickness: 8 - 30mm
- 2) Belt Thickness: 3 - 6 mm
- 3) Work Piece Width: 65 - 125mm
- 4) Working Speed: 10 - 23 M/dk
- 5) Glue Pot Volume: 3 kg
- 6) Total Motor Power: 15kw
- 7) Total Electric Power: 18kw
- 8) Air Pressure: 6 Bar
- 9) Working Size (mm): 5500x1200x1550
- 10) Transportation Size (mm): 3000x1200x1550
- 11) Weight: 2000kg

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MOVA VACUUM PRESS MACHINE

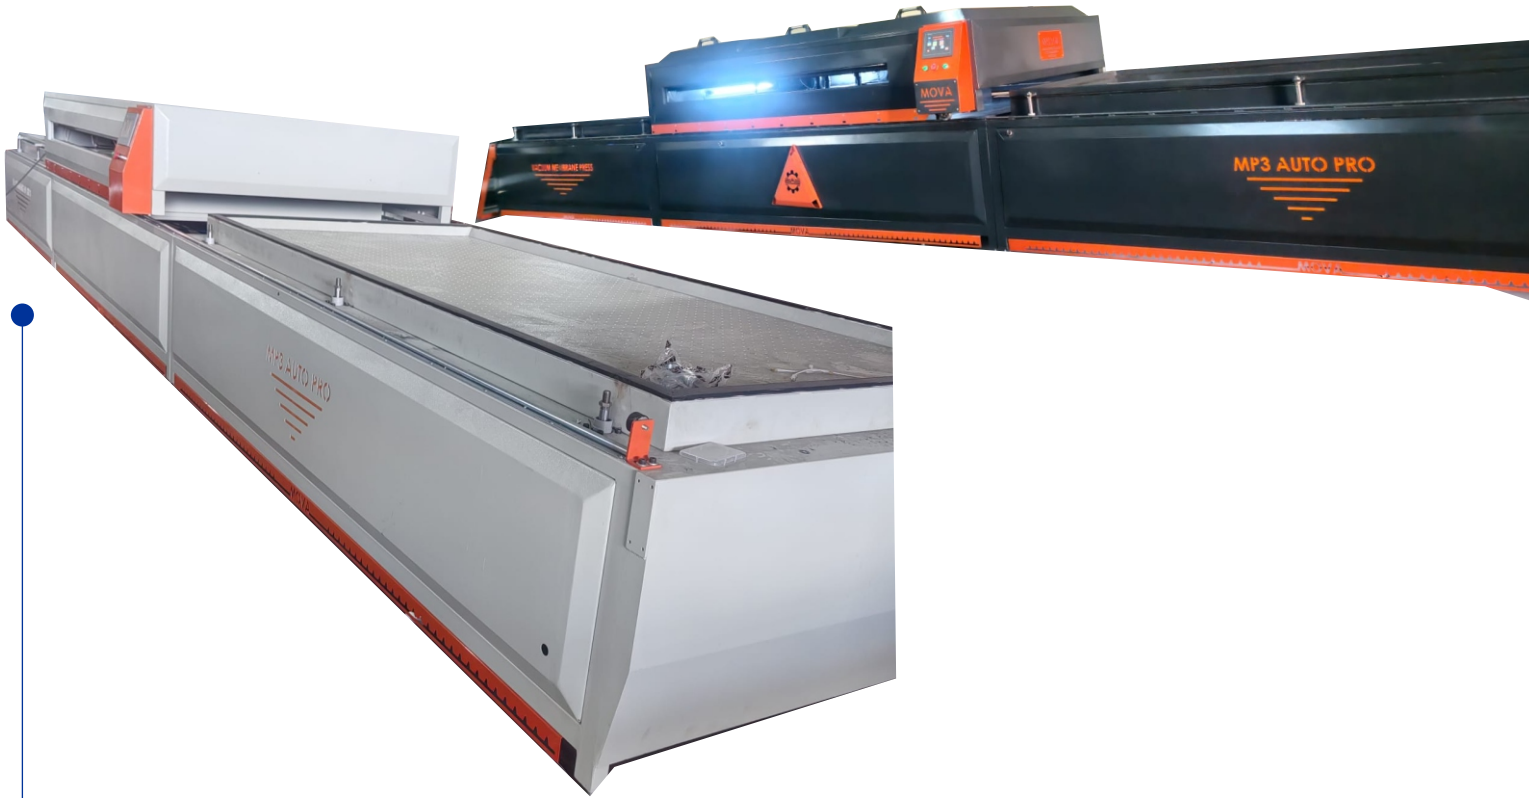

- 1) TABLE DIMENSIONS : 1400X3100 (D:75) / 1400X1200 (D:75) / 1400X2400 (D:75)
- 2) TABLE MATERIAL : METAL
- 3) RACK&PINION SYSTEM : 25X25XMOD2 GAMBINI ITALIAN
- 4) VACUUM PUMP: VAKEM 100 M3
- 5) VACUUM ON/OFF SYSTEM : 1" ACTUATOR VANE
- 6) MOVEMENT : 0.37 KW 1400 RPM R:1/10 S:40
- 7) OPERATOR CONTROL : DELTA 7" TOUCH PANEL
- 8) FAULT WARNING : VISUAL AND AUDIBLE
- 9) TEMPERATURE MEASUREMENT SYSTEM : INFRARED HEAT SENSOR
- 10) RESISTANCE : 620mm 190V 600W
- 11) TABLE SYSTEM : AUTOMATIC PISTON SYSTEM
- 12) SUPPORTS : MANUEL MOVABLE SUPPORTS
- 13) PLC & ELECTRICAL SYSTEMS :DELTA

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MAKSERTEAM VACUUM MEMBRANE PRESS

TABLE	1400 X 3000 / 1400 X 1400 / 1400 X 2400 MM
TURBINE	190V 600W 620 MM R
VACUUM SYSTEM	100 M3 / HOUR
HEAT MEASUREMENT SENSOR	INFRARED HEAT SENSOR
PVC LOADING UNIT	SPECIAL DESIGN / 4
MOLDING SYSTEM	MANUEL SPECIAL DESIGN

FAILURE WARNING SYSTEM	AUDIBLE & VISUAL
OPERATOR PANEL	TOUCH PANEL 7"
ELECTRICAL&ELECTRONICAL EQUIPMENT	PROFESSIONAL
MOVING MOTOR	0.37 KW 1/15 S40
OPERATING TIME	3-4 MINUTES
WEIGHT	1950 KG
DIMENSIONS	W:1700 H: 1450 L:9000
TOTAL ENERGY CONSUMPTION	6 BAR 34 KW



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

STRECH FILM MACHINE

MODEL	PRO 1400		
Ring Diameter	1360	Conveyor Load Capacity (kg/m)	120
Max. Width (mm)	2600	Max. Crown Velocity (rpm)	70
Max. Height (mm)*	2200-2650	Total weight (kg)	950
Conveyor height (mm)	870-900	Welding Unit weight (kg)	410
Conveyor width (mm)	900	Installed Power(kw)	3
Infeed Conveyor length (mm)	1300	Power Supply (V)	400V 3Ph+N 50/60 Hz
Welding Unit Conveyor (mm)	1800	Working Pressure (Bar)	5-7
Outfeed Conveyor (mm)	1300		



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

SCREW COMPRESSOR 2000 LITER

- 1) Compressor Air Capacity: 6.5 m³ \ min.
- 2) Working Pressure: 8 Bar - 10 Bar
- 3) Motor Power: 37 KW - 50 HP
- 4) Operating Voltage: 400 V3 Phase \ 50\60 Hz
- 5) Control Panel: MAN 60.80 Digital Screen
- 6) Noise Level: 62 DB (A)
- 7) Tank Capacity: 2000 LT Air Tank
- 8) Dryer: 6.5 m³



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

SCREW COMPRESSOR 1000 LITER

- 1) Motor Power: 22kw 30hp
- 2) Air Pressure: 8 \ 10 \ 12
- 3) Air Intake Capacity (Lt\Min): 3.5 m3
- 4) Tank Capacity (Lt): 1000 Lt
- 5) Dryer (Lt\Min): 2200 \ 3000



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

COMPRESSOR 500 LITER



- 1) 500 liter air compressor
- 2) 7,5 hp





موسسة تكوين الحديثة للمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MOSA HOT PRESS MACHINE



- 1) Industry: Completely Italian Components and Assembly In Our Factories
- 2) Platen Size Y*X: 1300x3000
- 3) Dimensions: 3500*1600*1850mm
- 4) Operating Dimensions: 2500*1300mm
- 5) Number of Layers: 2 \ 3 Plates
- 6) Production Capacity: 2 \ 3 Presses
- 7) Cylinders Number: 6 Piston
- 8) Cylinders Diameter: 7.5 \ 8 mm
- 9) Press Pressure: 120 ton
- 10) Heating Capacity: 36 kw (two heaters)
- 11) Pressure Motor Capacity: 4 \ 7.5 hp
- 12) Voltage: 400v, 50hz, 3ph
- 13) Weight: about 4200 kg

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18

www.takwinmodern.com

Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com

Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

GLUE MACHINE



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

DOOR SIZING MACHINE

- 1) Nominal Current: 380-400V ACP-50-60Hz
- 2) Sound LevelLWA: 111.1 DB(A)
- 3) Air Pressure: 6-8 BAR
- 4) Sizing Saw: $\text{Ø}250 \times \text{Ø}30 \times 3.2\text{mm}$
- 5) Diameter: $\text{Ø}250 \times 30 \times 3.2\text{mm}$
- 6) Cutting Motor: $\text{Ø}70 \times 50 \times 20$ Z4
- 7) Milling Cutter: $\text{Ø}125 \times 20 \times 3.2\text{mm}$
- 8) Front Cutter: $\text{Ø}19 \times 135\text{Z}:2$
- 9) Lock Arm Cutter: $\text{Ø}23.5 \times 55\text{z}4$
- 10) Cutting Motor: $\text{Ø}25 \times 150$ Z4
- 11) Cutting Motor: 4kw 3445rpm
- 12) X Axis Motor: 5.5kw 3000rpm
- 13) Sanding Motor: 0.37kw 3000 dollars/minute
- 14) Freezing Motors: 1.5 kW 12000 rpm
- 15) Bridge Motor: 0.75kw 3000 rpm
- 16) Total Electric Power: 30.41 kW
- 17) Machine Width: 2100 mm
- 18) Machine Length: 3600 mm
- 19) Machine Height: 2200 mm
- 20) Machine Weight: 1580 kg

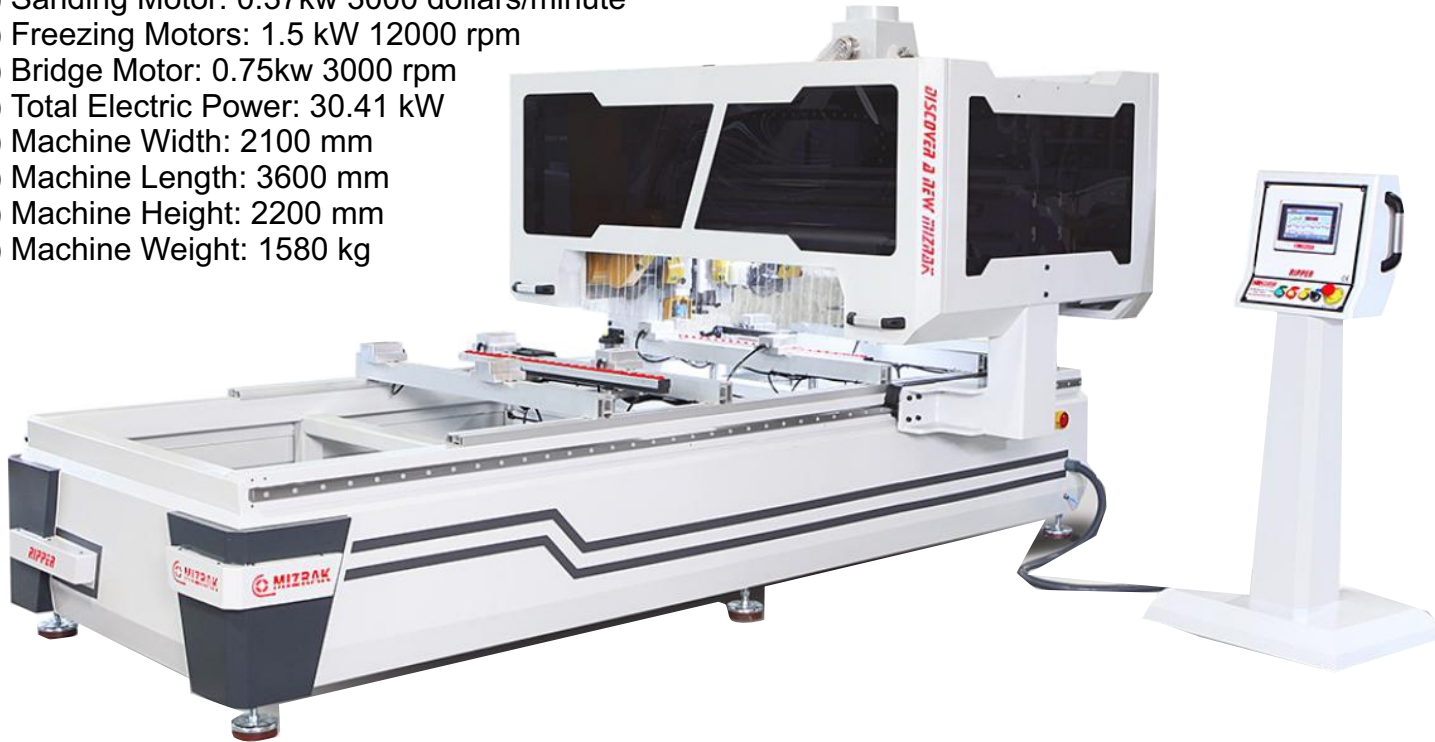

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

CASE PROFILE DRAWING MACHINE

TECHNICAL FEATURES

Working Width	: 80-320 mm
Working Height	: 100 mm
Engine Power	: 7.5 kW x 4
Engine Speed	: 9000 rpm



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

SKIRTING MACHINE

TECHNICAL FEATURES

Thickness Of Main Workpiece	: 8-30 mm	Output For Sawdust	: 2 pcs / Ø115 mm - Ø80 mm
Thickness Of Side Workpiece	: 3-6 mm	Total Electric Power	: 11,5 kW
Width Of Main Workpiece	: 60-120 mm	Air Pressure	: 6 bar
Width Of Side Workpiece	: 10-80 mm	Grid Voltage	: 380 V, 50-60 Hz
Working Speed	: 16 m/min	Current Intensity	: 45 A
Glue Pot Capacity	: 3 kg	Working Dimensions	: 5500 x 1400 x 1200 mm
Resistance Power Of Glue Pot	: 3650 watt	Weight	: 950 Kg
Total Motor Power	: 8,67 kW		



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

3 IN 1 FIBER LASER WELDING MACHINE CCW 1500W

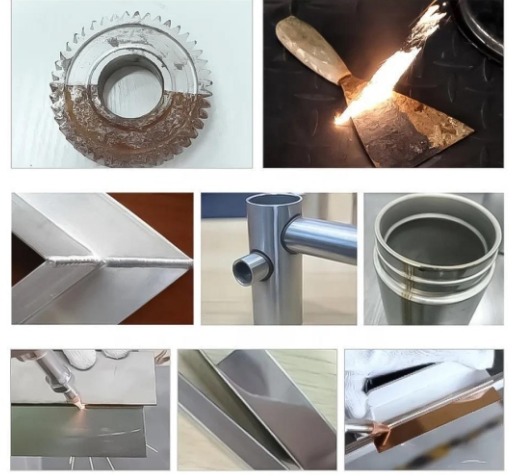

CCW 1500W Handheld "3 in 1" Fiber Laser Welding Machine



This machine is based on the 3-in-1, and the function of welding seam cleaning is newly added. One machine has four functions. Humanized design, No need to buy several laser machines for these different laser process jobs. Our laser system is very suitable for stainless steel & aluminum alloy welding, also can do welding on carbon steel, titanium alloy and etc. Also it can be used for rusty removal and handheld metal cutting.

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689






موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

CNC METAL CHANNEL LETTER BENDING MACHINE BEL-K120

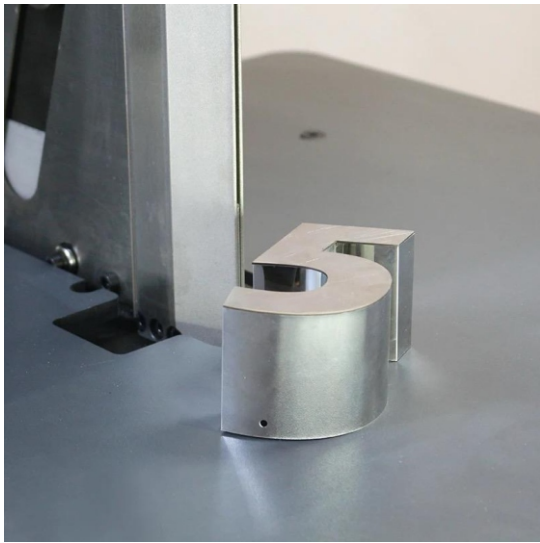

Cnc Metal Channel Letter Bending Machine
BEL-K120

Brief Introduction

BEL-K120 stainless steel channel letter bending machine is a professional sign making equipment for processing flat stainless steel, galvanized sheet and flat aluminum luminous characters. Stainless steel bending need to be matched with laser cutting laser cutting machine and laser welding machine, while flat aluminum bending need to be matched with advertising engraving machine, which can complete most of the processing process of luminous sign logo on the market.





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

CASE 45-90 CUTTING DOWEL OPENING MACHINE

Maximum Cutting Width	:	320 mm	Hole Centers Range	:	32mm x 7 pcs
Maximum Cutting Length	:	2600 mm	Cutting Unit Motors	:	2 x 2,2 Kw
Minimum Cutting Length	:	650 mm	Hole Unit Motors	:	2 x 1.1 Kw
Minimum Cutting Height	:	90° to 90 mm	Total Power	:	6,6 Kw
Maximum Cutting Height	:	45° to 45 mm	Voltage	:	380v/50Hz
Cutting Units	:	2	Air Pressure	:	6 bar
Cutting Unit Speed	:	3800 rpm	Length	:	3450 mm
Saw Diameter	:	350 mm	Width	:	1050 mm
Hole Units	:	2	Height	:	1450 mm
Hole Unit Cycle	:	2800 rpm	Weight	:	800 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

NETMAK FR 2000 SPINDLE MOULDER MACHINE

- * Monoblock Steel Body
- * Door Protection
- * Electromechanical Brake System
- * Curved Piece Apparatus
- * Sensitive Adjustment Possibility By Means Of Digital Height Indicator

Table Size	: 1000x750 mm
Table Type	: Sliding Carriage
Table Height	: 850 mm
Diameter Of Spindle	: 30 mm
Clamps	: 14 mm
Vertical Movement Of Spindle	: 150 mm
Taper Of Spindle Morse	: 5 MK
Motor Power	: 7.5 HP / 5.5 KW
RPM Of Spindle	: 4000-6000-8000-10000 rpm
Overall Dimensions	: 850x1000x1400 mm
Net Weight	: 550 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

PL 500 SURFACE PLANNER

Optional Specifications:

- * Digital Height Indicator
- * Automatic Table Adjustment
- * Helical cutter head

Table Size	: 500x2600 mm
Front Table Length	: 1420 mm
Rear Table Length	: 1180 mm
Max. Cutting Depth	: 15 mm
Number of Knives	: 4
Diameter Of Cutter Spindle	: 120 mm
RPM Of Spindle	: 4500 rpm
Motor Power	: 7.5 HP / 5.5 KW
Overall Dimensions	: 900x2650x1250 mm
Net Weight	: 770 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

NETMAK KA 50 THICKNESS MACHINE

Optional Specifications:

- * Motorized height adjustment
- * Sensitive Adjustment Possibility By Means Of Digital Height Indicator
- * Helical cutter head

Table Size	: 520x890 mm
Max. Working Width	: 500 mm
Max. Working Height	: 250 mm
Max. Cutting Depth	: 8 mm
Number of Knives	: 4
Diameter of Cutter Spindle	: 4500 rpm
Feeding Speed	: 7-14 m/min
Spindle Motor Power	: 7.5 HP / 5.5 KW
Feeder Motor Power	: 0,9-1,22 HP
Table Adjustment Motor*	: 0,25 HP
Overall Dimensions	: 900x1100x1050 mm
Net Weight**	: 740 kg



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646


VAT.No 310997524100003

3 IN 1 45 DEGREE AND STRAIGHT EDGE BANDING MACHINE



EDGE BANDING MACHINE

- High speed automatic
- Straight line, 45 degree hypotenuse

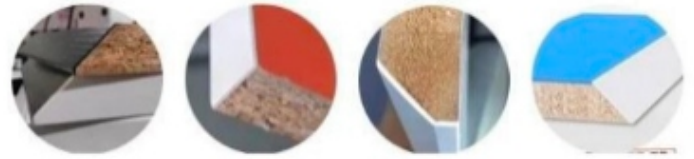

Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





JY700-3 CURVED EDGE BANDING MACHINE

- 1) Power Supply Voltage 380v/60hz/3phase
- 2) Total Power: 6.5kw
- 3) Air Source Pressure: 0.6-0.8mpa
- 4) Glue Pot Capacity: 2600ml
- 5) Glue pot temperature: 110 -210
- 6) Hot Melt Adhesive Type: PUR/EVA
- 7) Width of Sealing Strip: 14-70mm
- 8) Thickness of Edge Banding Strip: 0.5-3mm(related to the material of edge banding strip)
- 9) Trimming Plate Thickness: single trimming: single trimming: <14mm
double trimming up and down: 14-70mm (related to trimming knife)
- 10) Inner arc radius: Min 20mm (special operation sealable radius 4mm)
- 11) Banding speed: 0-30cm/s
- 12) Copying speed: 0-24cm/s
- 13) Gas tank capacity: 2000ml
- 14) Head rotation angle: 15°
- 15) External suction: dia 150mm
- 16) Air volumn: 9800m³/h
- 17) Type of edge strip: PVC,veneer (needs to be designed) ,plastic,melamine
- 18) Weight: 530kg (half wooden case)





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

CX-K2 LOCK HOLE DRILLING CNC ROUTER

- 1) EFFECTIVE MACHINING STROKE OF AXIS X 2400mm
- 2) TRAVEL Y-AXIS 120mm
- 3) BED STRUCTURE Thick wall square pipe welding
- 4) OVERALL DIMENSION 1500mm*3600mm
- 5) MAXIMUM RUNNING SPEED 30m/min
- 6) MAXIMUM ENGRAVING SPEED 25m/min (according to material and engraving depth)
- 7) REPEAT POSITIONING ACCURACY ± 0.05 mm
- 8) WORKING VOLTAGE 380V/50HZ
- 9) SPINDLE SPEED 6000-18000rpm/min
- 10) PLATE FIXING METHOD Automatic platen + Mobile platen
- 11) TRANSMISSION MODE Helical transmission + lead screw
- 12) GUIDE Taiwan high precision Y-axis 25, X / z25 square rail
- 13) OPERATION MODE Servo motor drive
- 14) REDUCER Imported reducer
- 15) FREQUENCY CONVERTER Intelligent monitoring frequency conversion
- 16) DRIVING SYSTEM Self owned brand servo drive
- 17) CONTROL SYSTEM Self owned brand System
- 18) SPINDLE High frequency spindle
- 19) MAXIMUM TOOL CLAMPING HANDLE DIAMETER $\Phi 12.7$ mm
- 20) TABLE STRUCTURE Profile + roller
- 21) POSITIONING FUNCTION Automatic positioning cylinder
- 22) SUPPORTING ACCESSORIES Spanner, cutter, clamp, etc



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ALL KIND OF GLUE'S



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
WWW.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

BAND SAW MACHINE

Band Saw Machine

SEA-80-15

size: **80 cm**

table dimensions:

820 × 1,130 mm

engine power: **15 HP**



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

ST-4 SPINDLE MOULDER AUTOMATIC DRIVER MACHINE

* Usually used for spindle moulders, surface planers,
circular saw machines etc.

Number Of Rollers	:4
Roller Dimension	:110x50 mm
Motor Power	:1-1.15 HP
Motor RPM	:1500-3000 rpm
Feeding Speeds With	4-6 / 8-12 / 10-15 / 20-30
Reverse	: m/min
Net Weight	:80 kg
Overall Dimension	:600x1100x700 mm



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MOVABLE DUST COLLECTOR Mc9075

- 1) Length: 2120mm
- 2) Width: 810mm
- 3) Height: 2760mm
- 4) Fan Power: 7.5kw
- 5) Air Volume: 7500m³/h
- 6) Cleaning Method: High voltage pulse
- 7) Ash Storage: Movable dust bin



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للالات والمعدات
Takwin Modern EST. For Machinery & Equipment

C.R 4030395646

VAT.No 310997524100003

MOVABLE DUST COLLECTOR Mc9010

- 1) Length: 2120mm
- 2) Width: 810mm
- 3) Height: 2760mm
- 4) Fan Power: 10kw
- 5) Air Volume: 7500m³/h
- 6) Cleaning Method: High voltage pulse
- 7) Ash Storage: Movable dust bin



Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





موسسة تكوين الحديثة للمعدات والمعدات
Takwin Modern EST. For Machinery & Equipment


C.R 4030395646

VAT.No 310997524100003

DUST COLLECTOR TWO BAG WITH 10m COOPER PIPE



Motor Power: 3hP
Two Bags With The Cooper Pipe
Length of Cooper Pipe: 10m

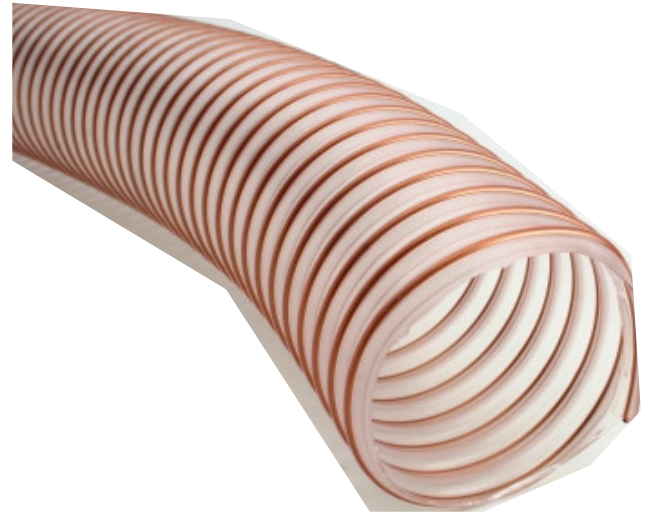


Jeddah/Al-Haramain Road/ Abraq Al-Raghama Area Riyadh \ Al-Manakh Area \ Al Kharj Road \ Exit-18
www.takwinmodern.com
Email: mertcanatakan@takwinmodern.com \ info@takwinmodern.com
Tel: 0555224689





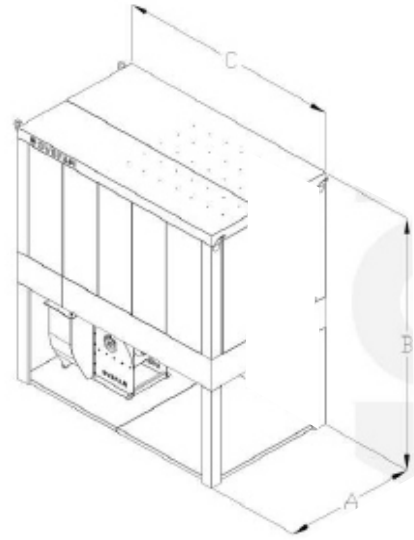

DUST COLLECTOR





A (mm)	B (mm)	C (mm)
1040	2030	2145


Weight 155


 Easy to use with specially designed clamp system

 Long lasting use with pressure chamber

 Maximum protection from external factors thanks to electrostatic powder point

 High efficiency and dust holding ability

 Easy to use thanks to the fan coupled to the unit

 Filter cleaning with optional vibration motor

AIRFLOW m ³ /h	MOTOR POWER	VACUUM VELOCITY	VACUUM DIAMETER	FILTER SIZE	FILTER QUANTITY	WASTE POUCH SIZE
8500	10 HP 3000 rev/min	32 m/sn	300 mm	180 x 1200 m	33/5 PCS	6 PCS 400 x 1100 mm PVC

